

INCH-POUND

MIL-DTL-5815/1A
18 June 2003
SUPERSEDING
MIL-A-5815/1
18 March 1977

DETAIL SPECIFICATION SHEET

ANTENNA, BLADE, UHF, AT-256A/ARC (SERIES N CONNECTOR)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the antenna described herein shall consist of this specification sheet and MIL-DTL-5815.

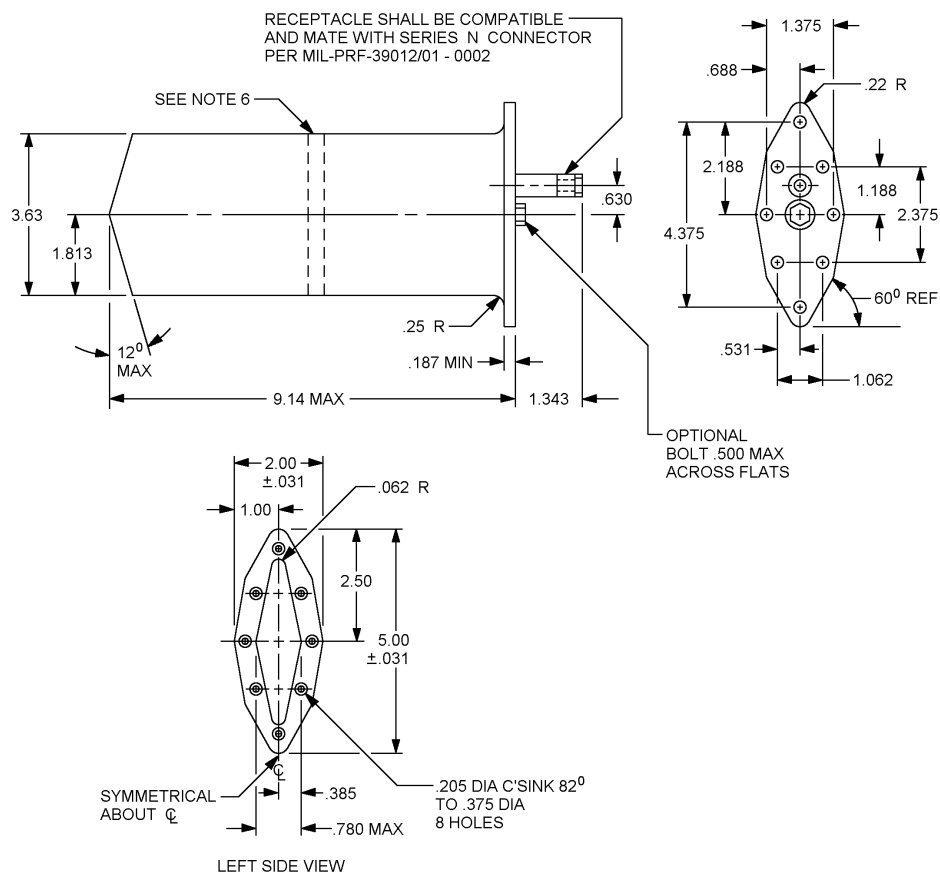


FIGURE 1. Dimensions and configuration.

MIL-DTL-5815/1A

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	.08	.219	5.56	.630	16.00	1.813	46.05
.005	.13	.250	6.35	.687	17.45	2.000	50.80
.010	.25	.260	6.60	.75	19.05	2.187	55.55
.030	.76	.375	9.53	.770	19.56	2.375	60.33
.031	.79	.385	9.78	1.062	26.97	2.75	69.85
.054	1.37	.430	10.92	1.187	30.15	3.625	92.08
.062	1.57	.500	12.70	1.343	34.11	4.375	111.13
.125	3.18	.520	13.21	1.375	34.93	5.000	127.00
.187	4.75	.531	13.49	1.625	41.28	9.014	237.96
.205	5.21						

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Unless otherwise specified, tolerances are ± 0.005 (.13 mm) for three place decimals and ± 0.02 (.51 mm) for two place decimals; tolerances for angles are $\pm 0.05^\circ$.
5. Any alternate bolt or bolt head configuration may be used within the cited maximum limits so long as the antenna meets the performance requirements of this specification.
6. The cover may be of a one or two piece construction.

FIGURE 1. Dimensions and configuration - Continued.

MIL-DTL-5815/1A

REQUIREMENTS:

Dimensions and configuration: See figure.

Class of equipment: Class 2.

Materials:

Base: Aluminum alloy per ASTM B85 Alloy SC84B (ANSI 380.0, UNS alloy A03800).

Cover: Suitable material that will resist erosion of impinging particles at velocities up to Mach 0.95.

Finish: Anodize all aluminum alloy surfaces, with the exception of the surface that interfaces with the skin of aircraft, in accordance with MIL-A-8625, Type I.

Temperature operating range: -54°C to 125°C, and intermittent to 150°C.

Static load: 8 psi applied perpendicular to the blade, with an ultimate of 12 psi.

Frequency range: 225 to 400 MHz.

Characteristic impedance: 50 ohms, nominal.

VSWR: 2:1 maximum, from 225 to 400 MHz.

Radiation power: 50 watts, average.

Polarization test frequency: 315 MHz.

Seal test: 70,000 feet.

Weight: 24 ounces, maximum.

Part number: M5815/1-01.

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-1263)

Review activities:
Army - AV
Air Force - 99